

CNC SHEET METAL PRESS BRAKES

PBA

PBH

PBC

 **Yawei** 亚威

Stock Code 002559

Products Catalogue

Pursuit of excellence, insistence to innovation	02
PBA Series	04
PBH Series	10
PBC Series	16
Chart of force for Air bending	23

Yawei has been dedicating to the R&D, manufacturing of high efficiency high precision, and energy saving press brakes for more than 40 years. With massive successful experience, Yawei press brakes are serving for all kinds of sheet metal processing industries.

Find your very best bending solutions from our extensive product series and functional accessories.

Products advantages

- All new outlook design
- High speed and high efficiency bring higher profits
- High rigidity and high precision decide better quality
- Easy to operate, low maintenance cost



PBA Series

Universal CNC Press Brake

- Trustworthy Yawei quality, stable and reliable
- High quality bending operations to all types of workpieces
- Automatic mechanical crowning system, closed-loop control



PBH Series

High Speed CNC Press Brake

- High frequency response valve control technology, high dynamic response, high precision
- Low oil temperature control technology, reduce hydraulic breakdown rate and increase overall life time
- High precision and high efficiency bending to all kinds of workpieces



PBC Series

High Performance CNC Press Brake

- Automatic mechanical crowning system, closed-loop control, higher precision
- Automatic mechanical crowning compensation of the worktable with closed-loop control and higher accuracy
- High precision and high efficiency bending to all kinds of workpieces




PBA Series

Universal CNC Press Brake

- All new simplified design, elegant appearance
- Better parameters, better configurations, good performance, and easy to operate
- High rigidity machine frame, automatic mechanical crowning table for high precision bending operations

Multiple Configurations Flexible Combinations


Backgauge

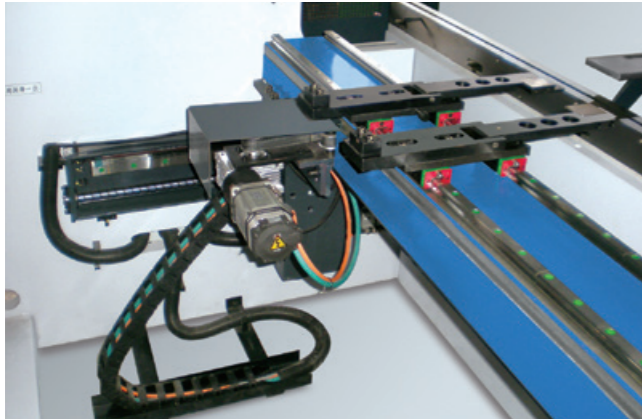

Standard Backgauge (Standard Configuration)

- CNC axis is driven by AC servo motor, moved with ball screw, guided by linear guide


Upper Tool Clamping

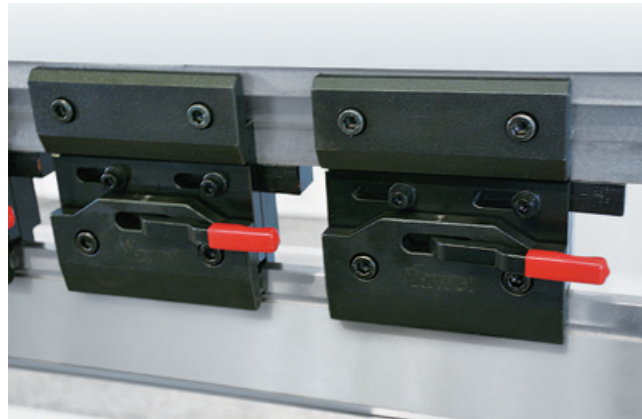

Mechanical Fast Clamping (Standard Configuration)

- Mechanical fast clamping enables a fast change of upper tool


Lower Die Clamping

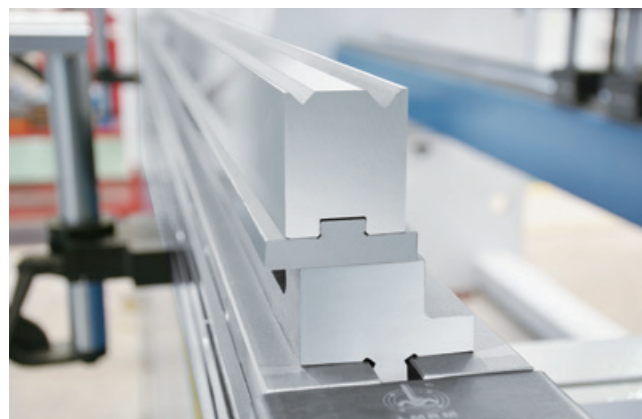

2-V Clamping (Standard Configuration)

- 2-V fast change clamping enables a fast change of lower die

Crowning Compensation

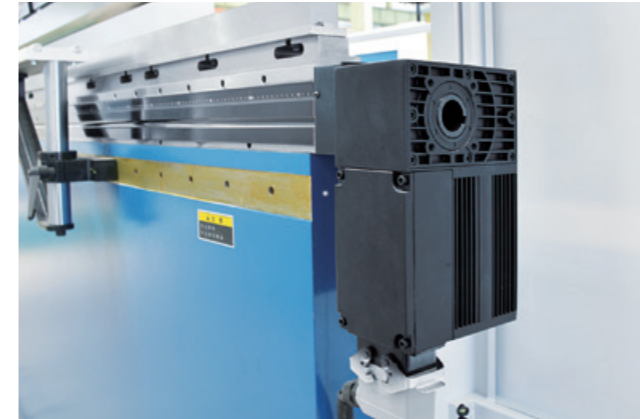

Mechanical Crowning Device (Standard Configuration)

- Automatic adjustment of crowning compensation according to the instructions programmed by CNC


Front Sheet Support



Step-adjusted Front Sheet Support (Standard Configuration)

- Standard front sheet support, manual adjustment of height, can be turned left and right

Laser Safety Guard

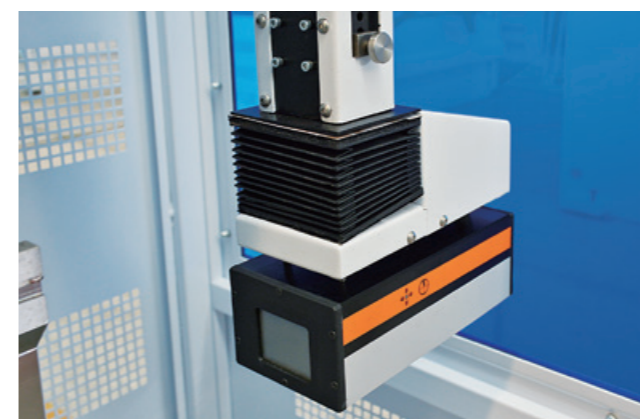

Laser Guarding Device (Option)

- CNC and safety controller can monitor the machine operations in real time to effectively protect the hands and arms of the operator

Multiple Configurations Flexible Combinations

Outstanding Parameters Extraordinary Performance

NCY64 CNC Controller(standard)



Function Features

- Color LCD display, 15" widescreen TFT
- More than 2000 programs and tool storage space
- Data storage via USB
- One-page parameter quick programming
- Automatic calculation of worktable crowning compensation
- 2D programming, 3D/2D simulation
- Automatic calculation of bending pressure, mold safety area
- Online operation analysis tool
- Angle correction database (option)
- System diagnosis function
- Up to six axis control (Y1, Y2, four auxiliary axis)


DA53T CNC Controller(Option)



Function Features

- 10.1" widescreen, TFT color display touch screen
- Up to four axis control
- Memory capacity 1GB
- One-page parameter quick programming, navigation shortcut keys
- Internal integrated valve amplifier
- Online operation analysis tool
- Network tandem machine device (option)
- System diagnosis function
- Real-time WINDOWS operating platform to ensure the stability of controller operation and support instant shutdown
- Automatic calculation of worktable crowning compensation
- Tool library 30 sets of upper tool/30 sets of lower tool

Technical Parameters

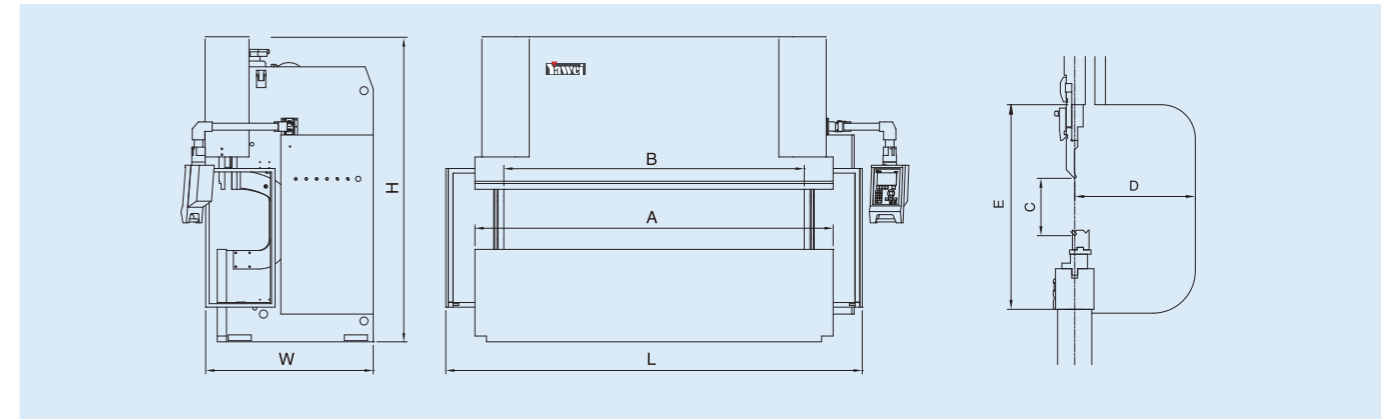

Model	Bending force	Bending length A	Distance between uprights B	Throat depth D	Ram stroke C	Die setting height E	Ram speed			Main motor power	Oil tank volume	Overall dimension LxWxH			Weight
	kN	mm	mm	mm	mm	mm	mm/s	mm/s	mm/s	kW	L	mm	mm	mm	kg
PBA-35/1250	350	1250	950	300	120	450	180	16	180	4	100	1930	1400	2200	3000
PBA-63/2050	630	2050	1750	350	175	480	180	12.5	140	5.5	150	2700	1450	2360	4000
PBA-63/2550		2550	2150								200	3200	1450	2560	5000
PBA-110/3100	1100	3100	2600	410	215	520	160	10	130	7.5	250	3560	1550	2620	7000
PBA-110/4100		4100	3600								300	4560	1550	2670	8500
PBA-160/3100	1600	3100	2600	410	215	520	130	9	120	11	350	3580	1600	2740	8600
PBA-160/4100		4100	3600								400	4580	1600	2810	10500
PBA-220/3100	2200	3100	2600	410	215	530	120	10	120	15	400	3600	1830	2820	10800
PBA-220/4100		4100	3600								500	4600	1830	2920	12800
PBA-300/3100	3000	3100	2600	410	265	580	120	9	100	22.0	450	3700	1900	3000	14000
PBA-300/4100		4100	3600								600	4700	1900	3100	16500



PBH Series


High Speed CNC Press Brake

- High frequency response valve control technology, high speed, high efficiency, and high precision
- Balancing valve control technology, less overflow and lower oil temperature, more stable and reliable performance
- Optimized parameters and configurations, more functions while easier to operate

PBH Series Hydraulic Control Technology

Multiple Configurations Flexible Combinations


Crowning Compensation

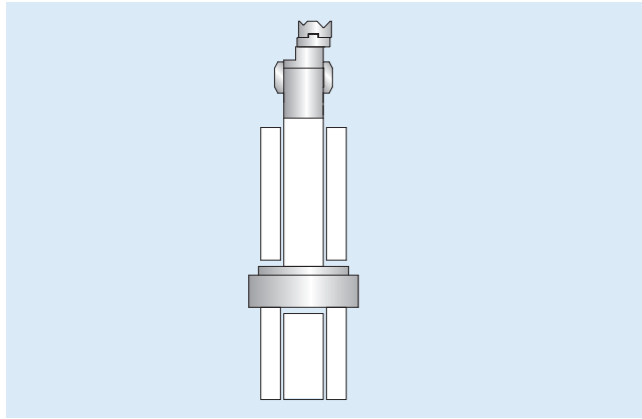

Hydraulic Crowning Technology (Standard)

- Hydraulic crowning system is composed of a group of hydraulic cylinders under the worktable, which enables a relative movement of the worktable to form a convex curve to make sure the relative position between the ram and the worktable remains unchanged after the worktable is under pressure. The crowning compensation value is calculated automatically by CNC according to the thickness of the sheet, the opening of the lower die, and other material properties

Balancing Control

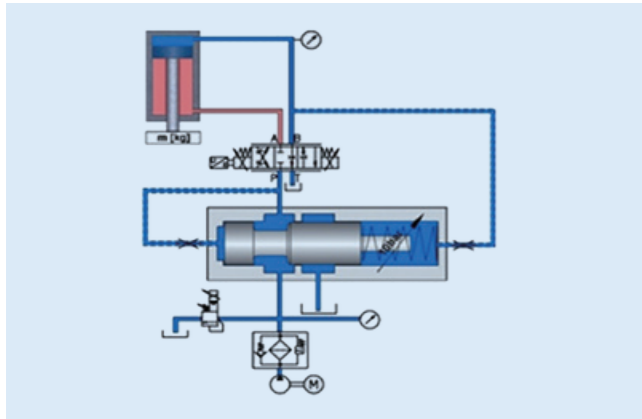

Pressure Differential Balancing Control Technology (Standard)

- Pressure differential balancing system can control the overflow of the hydraulic system in advance to effectively control the temperature of the hydraulic system, which helps for a long-term stabilized operation of the machine


Control Technology



High Frequency Response Control Valve Technology (Standard)


- Thanks to the high frequency response proportional valve, the synchronization precision of Y1 and Y2 in high speed operation is largely improved for higher bending efficiency

Backgauge

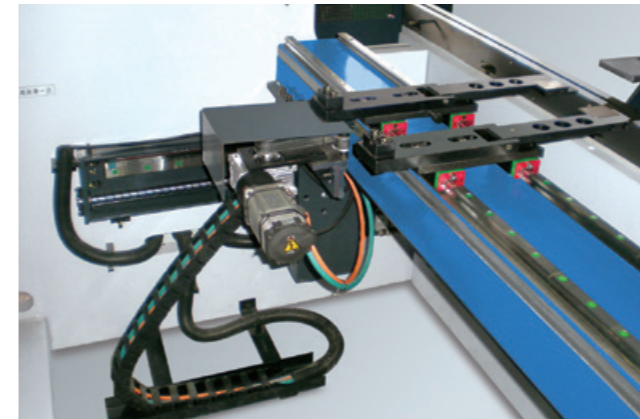


Dual-linear Guide Backgauge (Standard)

- Axis: X, R
- CNC axis is driven by AC servo motor, moved with precise ball screw, guided by linear guide

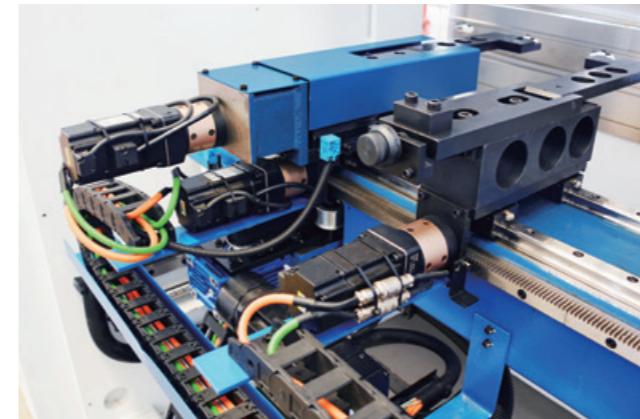

5-axis Backgauge (Option)

- Axis: X, R, Z1, Z2, X1
- Suitable for positioning of complicated workpiece, as well as workpiece with inclined plane

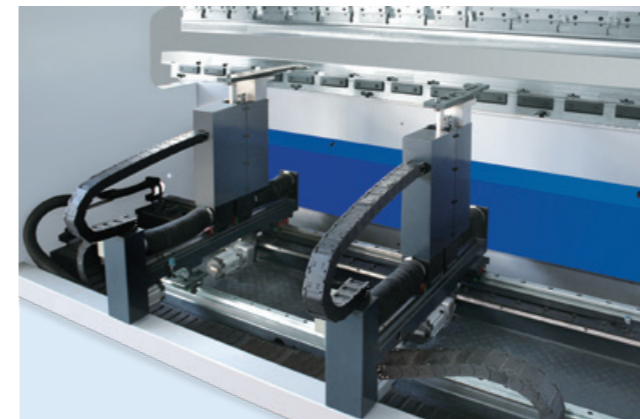

6-axis Backgauge (Option)

- Axis: X1, X2, R1, R2, Z1, Z2
- Suitable for positioning of complicated workpiece, as well as workpiece with inclined plane

Multiple Configurations Flexible Combinations


Outstanding Parameters Extraordinary Performance

Lower Die Clamping



2-V Structure Die (Standard)

- 2V-T type fast clamping enables a fast change of lower die

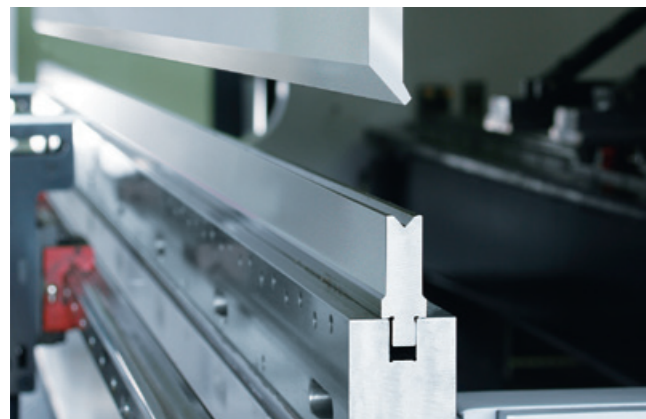

1-V Clamping (Option)

- 1-V clamping is used for high precision 1-V lower die. Fast change of lower die. 1-V lower die is narrow in width, very suitable for complicated flanging bending


Bending Help



Mechanical Servo Bending Help (Option)

- The sheet support of the bending help can follow up the sheet when it is in the bending process. The follow-up angle and speed are automatically calculated and controlled by CNC. Bending help can be moved along the linear guide

Technical Parameters

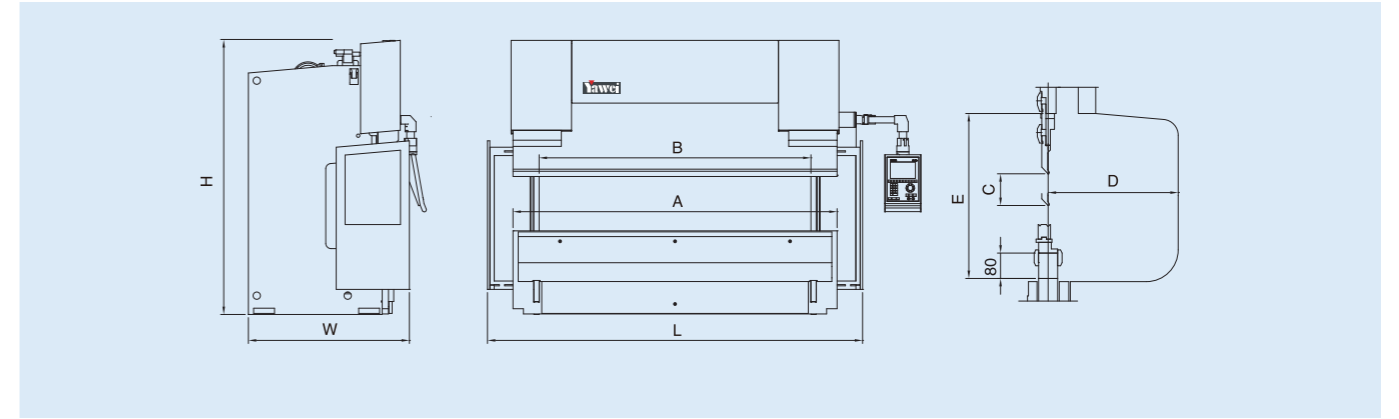


Model	Bending force	Bending length A	Distance between uprights B	Throat depth D	Ram stroke C	Die setting height E	Ram speed			Main motor power	Oil tank volume	Overall dimension LxWxH			Weight
	kN	mm	mm	mm	mm	mm	mm/s		kW	L	mm		mm	kg	
PBH-80/2550	800	2550	2150	350	175	480	200	14	170	7.5	230	3140	1540	2450	6500
PBH-110/3100	1100	3100	2600	410	215	520	200	14	160	11	300	3610	1550	2620	8800
PBH-110/4100		4100	3600								360			4610	
PBH-160/3100	1600	3100	2600	410	215	520	160	11	140	15	380	3630	1600	2670	10300
PBH-160/4100		4100	3600								430			4630	
PBH-220/3100	2200	3100	2600	410	215	530	130	10	120	18.5	400	3650	1850	2735	12800
PBH-220/4100		4100	3600								500			4650	
PBH-250/3100	2500	3100	2600	410	215	530	120	9	105	18.5	400	3650	1850	2735	13000
PBH-250/4100		4100	3600								500			4650	
PBH-300/3100	3000	3100	2600	410	265	580	120	9	100	22	450	3310	1890	2980	16000
PBH-300/4100		4100	3600								600			4310	

PBC Series


High Performance CNC Press Brake

- All new outlook design, friendly human-machine interface
- Automatic mechanical crowning table for high precision bending operations
- Optimized parameters and configurations, more functions while easier to operate

Multiple Configurations Flexible Combinations

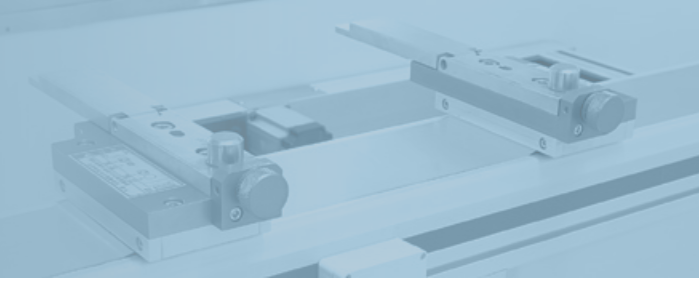


Crowning Compensation

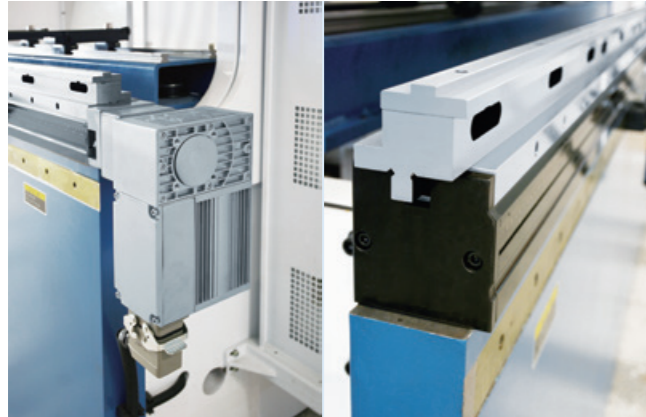

Mechanical Crowning Device (Standard)

- Automatic adjustment of crowning compensation according to the instructions programmed by CNC


Control Technology

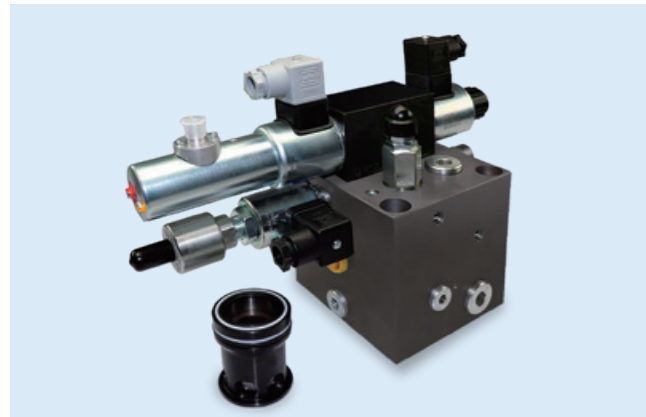

High Frequency Response Valve Control Technology (Standard)

- Thanks to the high frequency response proportional valve, the synchronization precision of Y1 and Y2 axis in high speed operation is largely improved for higher bending efficiency

Servo Motor

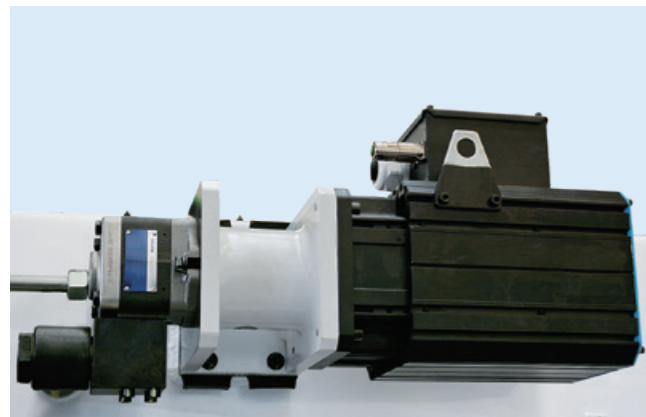

Servo Main Motor (Standard)


- Servo motor can save energy, reduce oil temperature, increase overall life time, and reduce maintenance cost

Upper Tool Clamping



Mechanical Fast Clamping (Standard)


- Mechanical fast clamping enables a fast change of upper tool
- Can install upper tool from front side

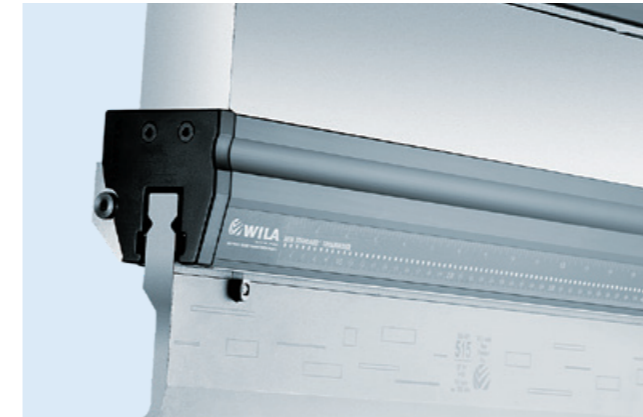

Hydraulic Clamping (Option)

- Clamping and loosening actions are electrically controlled. Strong clamping force, easy and effective change of tool

Lower Die Clamping

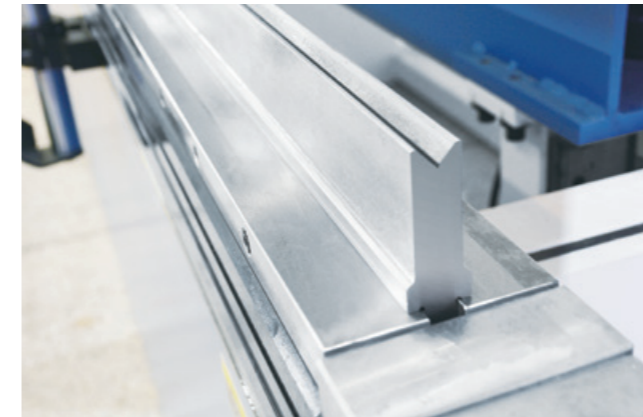


1-V Clamping (Option)

- 1-V clamping is used for high precision 1-V lower die. Fast change of lower die. 1-V lower die is narrow in width, very suitable for complicated flanging bending

Multiple Configurations Flexible Combinations


Lower Die Clamping

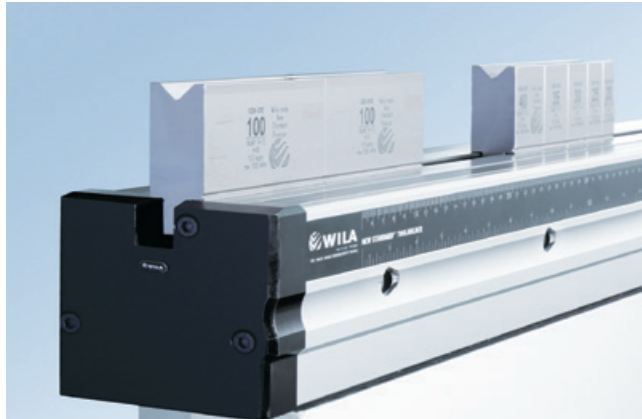

1-V Automatic Hydraulic Clamping (Option)

- Clamping and loosening actions are electrically controlled, easy and effective change of lower die

Front Sheet Support

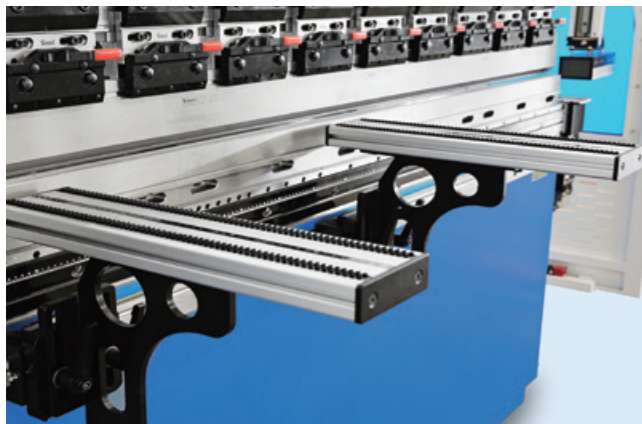

Front Sheet Support Moving Along Linear Guide (Standard)

- Front sheet support moving along linear guide



Front Sheet Support Moving Along Linear Guide (Option)

- Front sheet support moving along linear guide

NCY64 CNC Controller (standard)



Function Features

- Color LCD display, 15" widescreen TFT
- More than 2000 programs and tool storage space
- Data storage via USB
- One-page parameter quick programming
- Automatic calculation of worktable crowning compensation
- 2D programming, 3D/2D simulation
- Automatic calculation of bending pressure, mold safety area
- Online operation analysis tool
- Angle correction database (option)
- System diagnosis function
- Up to six axis control (Y1, Y2, four auxiliary axis)

DA58T CNC Controller (option)




Function Features

- Color LCD display
- 15" widescreen TFT
- Full touch screen operation
- 1GB storage capacity
- 2D programming, 2D display
- Data storage via USB
- Automatic calculation of bending process
- Network dual machine linkage (option)
- Automatic calculation of worktable crowning compensation
- Internal integrated valve amplifier

Outstanding Parameters Extraordinary Performance

Calculation Chart of Force for Air Bending

Technical Parameters

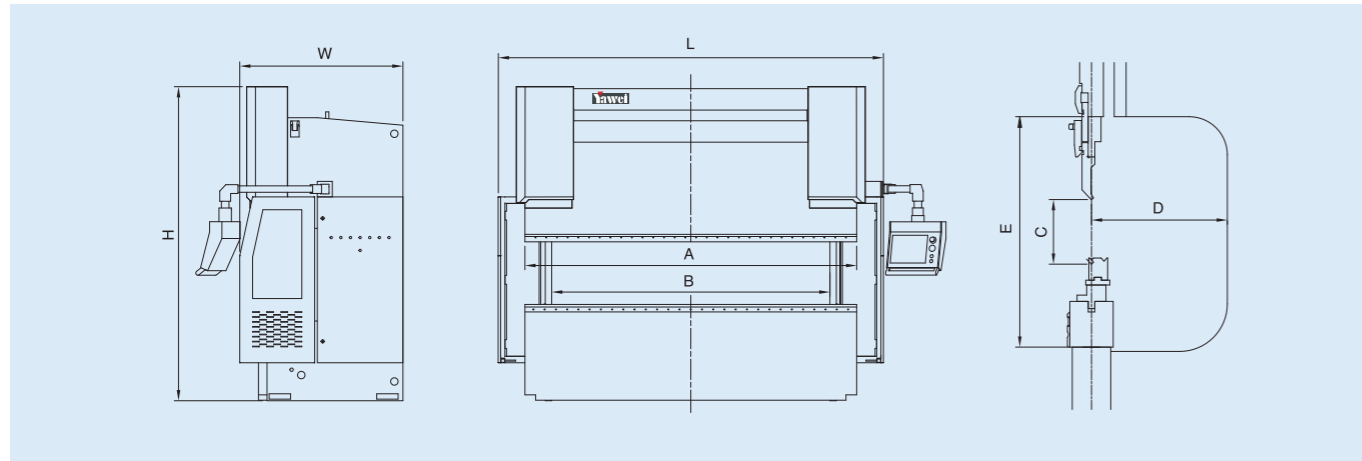


PBC Technical Parameters (Main Motor is Servo Motor)

Model	Bending force	Bending length A	Distance between uprights B	Throat depth D	Ram stroke C	Die setting height E	Ram speed			Main motor power	Oil tank volume	Overall dimension LxWxH			Weight
	kN	mm	mm	mm	mm	mm	mm/s	mm/s	mm/s	kW	L	mm	mm	mm	kg
PBC-30/1050	300	1050	950	90	120	450	200	20	200	3	40	1790	1235	2385	3000
PBC-50/2050	500	2050	1750	350	175	495	200	20	190	4.8	150	2550	1450	2485	4500
PBC-80/2550	800	2550	2150	350	175	495	200	17	200	8.4	200	3140	1540	2485	6000
PBC-110/3100	1100	3100	2600	410	215	535	200	15	180	8.4	200	3610	1550	2785	8500
PBC-110/4100		4100	3600				200	15	160	8.4	300	4610	1550	2835	9200
PBC-160/3100	1600	3100	2600	410	215	535	160	14	160	12	300	3630	1600	2835	10000
PBC-160/4100		4100	3600				160	14	150	12	400	4630	1600	2875	11900
PBC-220/3100	2200	3100	2600	410	215	545	120	12	130	15	300	3650	1850	2845	12300
PBC-220/4100		4100	3600				120	12	120	15	400	4650	1850	2945	14000

Calculation Chart of Force for Air Bending

- The calculation results are based on 90° bending with bending length 1 meter. This chart can help you to easily calculate the bending force needed per meter on different workpieces. The bending force needed is up to the thickness of the sheet and the opening width of the lower die. The shortest edge length and inside radius are decided by the opening width of the lower die

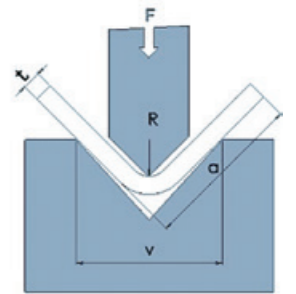

V	6	8	10	12	16	20	24	32	36	40	50	60	63	80	100	120	130	140
a	4.5	5	7	8.5	12	15	17	23	25	28	35	43	45	57	71	85	92	100
r	1	1.2	1.6	2	2.5	3	3.5	5	5.5	6	8	9.5	10	12	15.5	19	21	23
Thickness of sheet	0.5	2.5																
	0.8	7	4.8															
	1	11	8	6														
	1.2		12	9	7													
	1.5			15	12	8												
	2				23	16	20											
	2.5					26	20	15										
	3						30	24	16									
	4							44	31	28								
	5									47	43	31						
	6										61	45	36					
	8												69	65	47	36		
	10													80	60	47	43	
	12														90	71	65	58

Mild steel
450N/mm²

V	6	8	10	12	16	20	24	32	35	40	50	60	63	80	100	120	130	140
a	4.5	5	7	8.5	12	15	17	23	25	28	35	43	45	57	71	85	92	100
r	1	1.2	1.6	2	2.5	3	3.5	5	5.5	6	8	9.5	10	12	15.5	19	21	23
Thickness of sheet	0.5	4																
	0.8	11	8															
	1	18	13	10														
	1.2		19	14	11													
	1.5			24	19	13												
	2				37	26												
	2.5					42	32	24										
	3						48	38	26									
	4							70	50	45								
	5									75	69	50						
	6										98	72	58					
	8												110	104	75	58		
	10													128	96	75	69	
	12														144	114	104	93

Stainless steel
700N/mm²

F: Bending force T/m V: Opening Width of lower die mm a: Length of the shortest edge mm r: Inside radius mm

Best opening width of lower die

JIANGSU YAWEI MACHINE TOOL CO., LTD.

INTERNATIONAL

XIANCHENG INDUSTRIAL ZONE, HUANGHAI SOUTH ROAD

JIANGDU DIST. 225200 YANGZHOU, JIANGSU, CHINA

Sales hot line: +86-514-86880517 +86-514-86880518

Service phone: +86-514-86880517 +86-514-86880538

Part sales phone: +86-514-86880517

FAX: +86-514-86880521 +86-514-86882218

HTTP: www.yawei.cc

Email: sales2@yawei.cc



The above two marks both are commercial brand of Jiangsu Yawei Machine Tool Co., Ltd.
The contents are subject to change without prior notice

Service hot line: 400-000-2559



YAWEI WeChat



YAWEI Website